

# Integrated Silicon Pressure Sensor On-Chip Signal Conditioned, Temperature Compensated and Calibrated

The MPX5100 series piezoresistive transducer is a state-of-the-art monolithic silicon pressure sensor designed for a wide range of applications, but particularly those employing a microcontroller or microprocessor with A/D inputs. This patented, single element transducer combines advanced micromachining techniques, thin-film metallization, and bipolar processing to provide an accurate, high level analog output signal that is proportional to the applied pressure.

## Features

- 2.5% Maximum Error over 0° to 85°C
- Ideally suited for Microprocessor or Microcontroller-Based Systems
- Patented Silicon Shear Stress Strain Gauge
- Available in Absolute, Differential and Gauge Configurations
- Durable Epoxy Unibody Element
- Easy-to-Use Chip Carrier Option

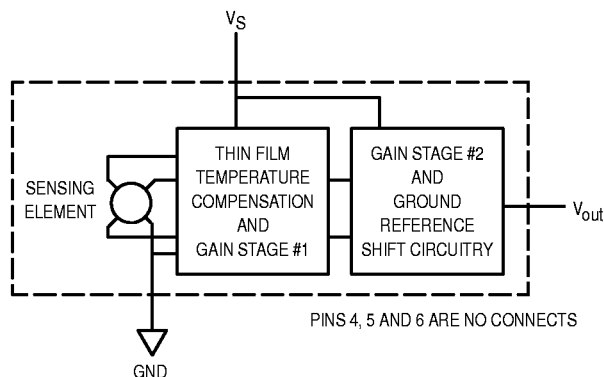


Figure 1. Fully Integrated Pressure Sensor Schematic

## MAXIMUM RATINGS(1)

Parametrics	Symbol	Value	Unit
Overpressure(2) (P1 > P2) (P2 > P1)	P <sub>max</sub>	400 400	kPa
Burst Pressure(2) (P1 > P2)	P <sub>burst</sub>	1000	kPa
Storage Temperature	T <sub>stg</sub>	-40° to +125°	°C
Operating Temperature	T <sub>A</sub>	-40° to +125°	°C


1. T<sub>C</sub> = 25°C unless otherwise noted.

2. Exposure beyond the specified limits may cause permanent damage or degradation to the device.


## MPX5100 SERIES

### OPERATING OVERVIEW INTEGRATED PRESSURE SENSOR

0 to 100 kPa (0 to 14.5 psi)  
15 to 115 kPa  
(2.18 to 16.68 psi)  
0.2 to 4.7 Volts Output



BASIC CHIP CARRIER  
ELEMENT  
CASE 867-08, STYLE 1



DIFFERENTIAL PORT OPTION  
CASE 867C-05, STYLE 1

NOTE: Pin 1 is the notched pin.

PIN NUMBER			
1	V <sub>out</sub>	4	N/C
2	Gnd	5	N/C
3	V <sub>S</sub>	6	N/C

NOTE: Pins 4, 5, and 6 are internal device connections. Do not connect to external circuitry or ground.

## MPX5100 SERIES

**OPERATING CHARACTERISTICS** ( $V_S = 5.0$  Vdc,  $T_A = 25^\circ\text{C}$  unless otherwise noted,  $P_1 > P_2$ )

Characteristic	Symbol	Min	Typ	Max	Unit
Pressure Range <sup>(1)</sup> Gauge, Differential: MPX5100D Absolute: MPX5100A Vacuum: MPX5100GV <sup>(11)</sup>	$P_{OP}$	0 15 0	— — —	100 115 100	kPa
Supply Voltage <sup>(2)</sup>	$V_S$	4.75	5.0	5.25	Vdc
Supply Current	$I_o$	—	7.0	10	mAdc
Minimum Pressure Offset <sup>(3)</sup> @ $V_S = 5.0$ Volts	$V_{off}$	0.088	0.20	0.313	Vdc
Full Scale Output <sup>(4)</sup> @ $V_S = 5.0$ Volts	$V_{FSO}$	4.587 3.688	4.700 3.800	4.813 3.913	Vdc
Full Scale Span <sup>(5)</sup> @ $V_S = 5.0$ Volts	$V_{FSS}$	— —	4.500 3.600	— —	Vdc
Accuracy <sup>(6)</sup>	—	—	—	$\pm 2.5$	% $V_{FSS}$
Sensitivity	V/P	—	45	—	mV/kPa
Response Time <sup>(7)</sup>	$t_R$	—	1.0	—	mS
Output Source Current at Full Scale Output	$I_{o+}$	—	0.1	—	mAdc
Warm-Up Time <sup>(8)</sup>	—	—	20	—	mSec
Offset Stability <sup>(9)</sup>	—	—	$\pm 0.5$	—	% $V_{FSS}$

Decoupling circuit shown in Figure 4 required to meet electrical specifications.

## MECHANICAL CHARACTERISTICS

Characteristic	Symbol	Min	Typ	Max	Unit
Weight, Basic Element (Case 867)	—	—	4.0	—	Grams
Common Mode Line Pressure <sup>(10)</sup>	—	—	—	690	kPa

### NOTES:

1. 1.0kPa (kiloPascal) equals 0.145 psi.
2. Device is ratiometric within this specified excitation range.
3. Offset ( $V_{off}$ ) is defined as the output voltage at the minimum rated pressure.
4. Full Scale Output ( $V_{FSO}$ ) is defined as the output voltage at the maximum or full rated pressure.
5. Full Scale Span ( $V_{FSS}$ ) is defined as the algebraic difference between the output voltage at full rated pressure and the output voltage at the minimum rated pressure.
6. Accuracy (error budget) consists of the following:
  - Linearity: Output deviation from a straight line relationship with pressure over the specified pressure range.
  - Temperature Hysteresis: Output deviation at any temperature within the operating temperature range, after the temperature is cycled to and from the minimum or maximum operating temperature points, with zero differential pressure applied.
  - Pressure Hysteresis: Output deviation at any pressure within the specified range, when this pressure is cycled to and from minimum or maximum rated pressure at  $25^\circ\text{C}$ .
  - TcSpan: Output deviation over the temperature range of  $0^\circ$  to  $85^\circ\text{C}$ , relative to  $25^\circ\text{C}$ .
  - TcOffset: Output deviation with minimum pressure applied, over the temperature range of  $0^\circ$  to  $85^\circ\text{C}$ , relative to  $25^\circ\text{C}$ .
  - Variation from Nominal: The variation from nominal values, for Offset or Full Scale Span, as a percent of  $V_{FSS}$  at  $25^\circ\text{C}$ .
7. Response Time is defined as the time for the incremental change in the output to go from 10% to 90% of its final value when subjected to a specified step change in pressure.
8. Warm-up is defined as the time required for the product to meet the specified output voltage after the Pressure has been stabilized.
9. Offset stability is the product's output deviation when subjected to 1000 hours of Pulsed Pressure, Temperature Cycling with Bias Test.
10. Common mode pressures beyond what is specified may result in leakage at the case-to-lead interface.
11. Pressure Range: Vacuum sensor is rated to 100 kPa; part is tested to a vacuum pressure equivalent to 80 kPa.

ON-CHIP TEMPERATURE COMPENSATION, CALIBRATION and SIGNAL CONDITIONING

Figure 2 shows the sensor output signal relative to pressure input. Typical, minimum, and maximum output curves are shown for operation over a temperature range of 0° to 85°C using the decoupling circuit below. (The output will saturate outside of the specified pressure range.)

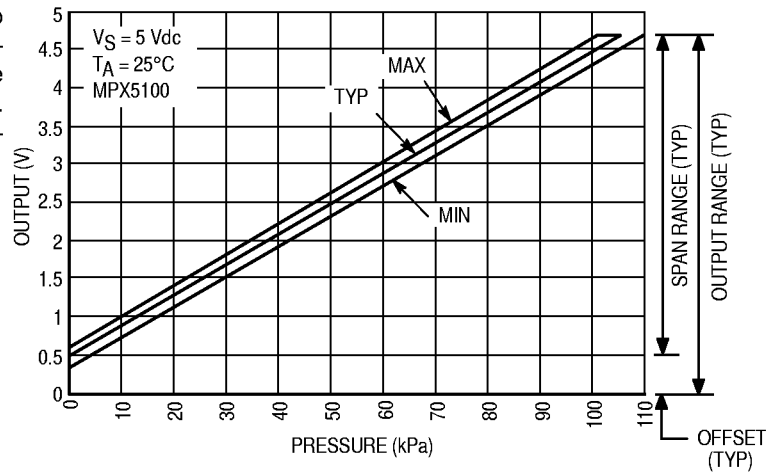


Figure 2. Output versus Pressure Differential

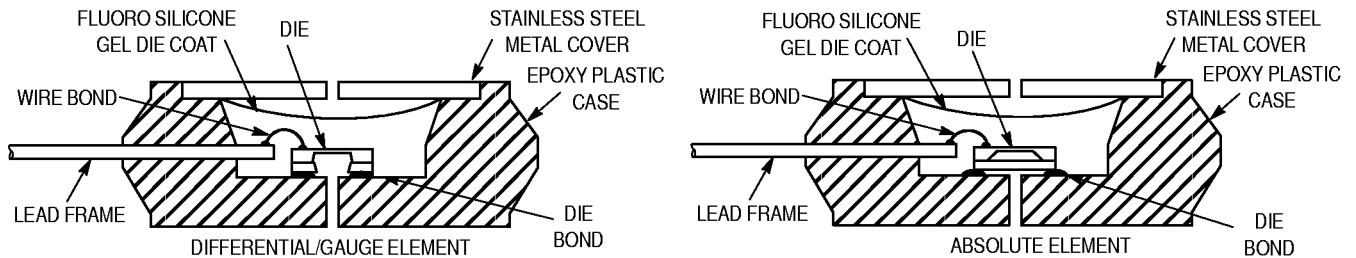


Figure 3. Cross-Sectional Diagrams (Not to Scale)

Figure 3 illustrates both the Differential/Gauge and the Absolute Sensing Chip in the basic chip carrier (Case 867). A fluorosilicone gel isolates the die surface and wire bonds from the environment, while allowing the pressure signal to be transmitted to the sensor diaphragm.

The MPX5100 series pressure sensor operating char-

acteristics, and internal reliability and qualification tests are based on use of dry air as the pressure media. Media, other than dry air, may have adverse effects on sensor performance and long-term reliability. Contact the factory for information regarding media compatibility in your application.

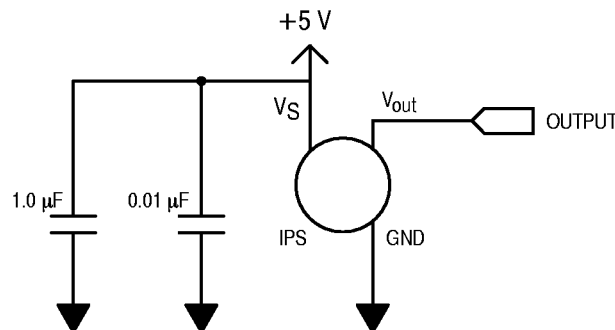


Figure 4. Recommended Power Supply Decoupling. For output filtering recommendations, please refer to Application Note AN1646.


## MPX5100 SERIES

### Transfer Function (MPX5100D, MPX5100GV)

**Nominal Transfer Value:**  $V_{out} = V_S (P \times 0.009 + 0.04)$   
 $\pm (Pressure\ Error \times Temp.\ Mult. \times 0.009 \times V_S)$   
 $V_S = 5.0\ V \pm 5\% P\ kPa$


### Temperature Error Multiplier

#### MPX5100D Series

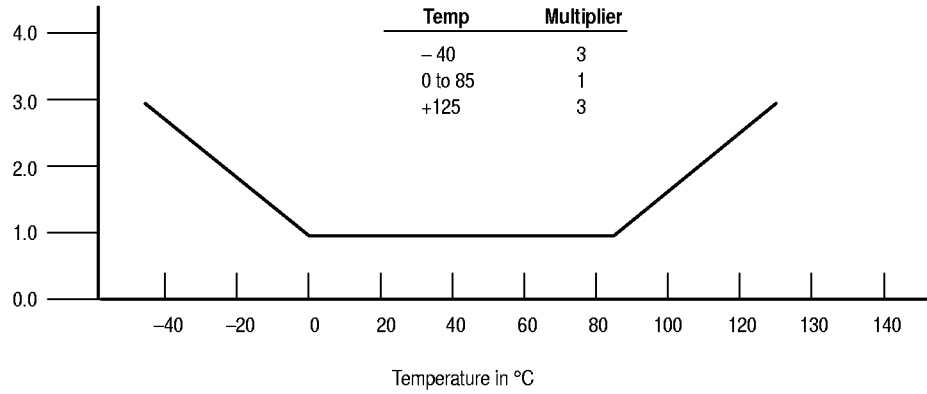

NOTE: The Temperature Multiplier is a linear response from 0° to -40°C and from 85° to 125°C.

### Pressure Error Band

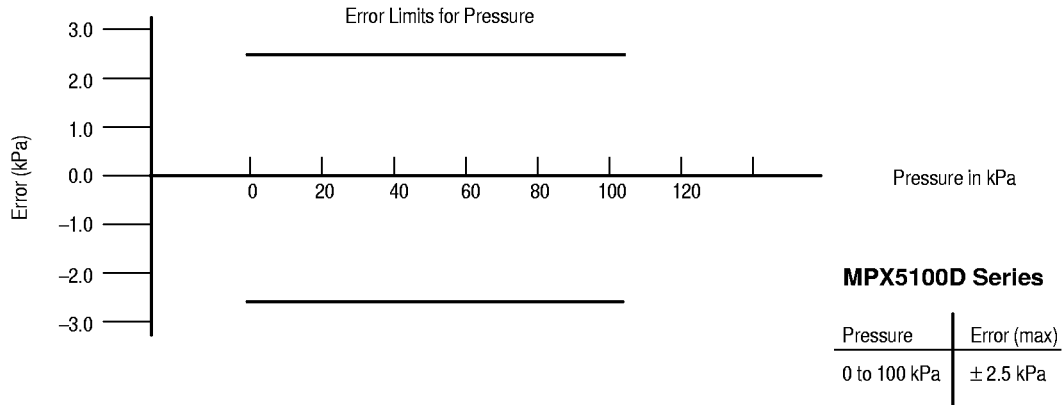


NOTE: For vacuum type parts (5100GV), Transfer Function is the same as that for 5100D Series.

**Transfer Function (MPX5100A)**


**Nominal Transfer Value:**  $V_{out} = V_S (P \times 0.009 - 0.095)$   
 $\pm$  (Pressure Error x Temp. Mult. x 0.009 x  $V_S$ )  
 $V_S = 5.0 \text{ V} \pm 5\% \text{ P kPa}$

**Temperature Error Multiplier**

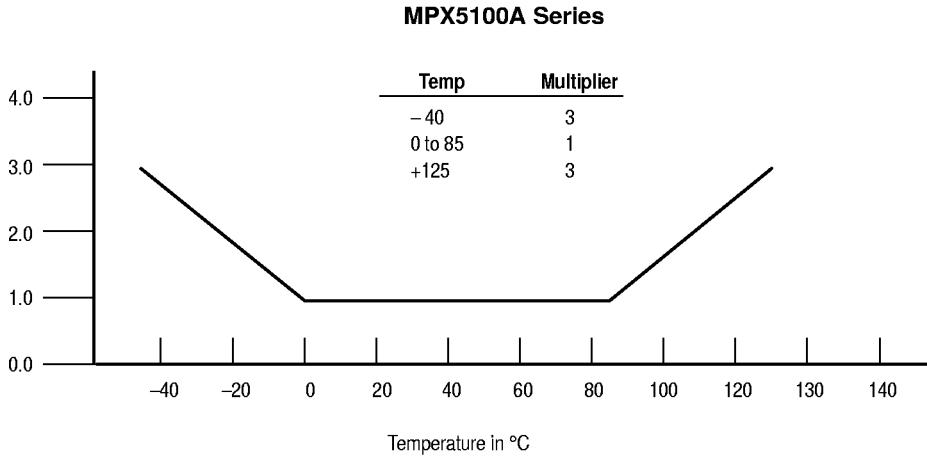

NOTE: The Temperature Multiplier is a linear response from 0° to -40°C and from 85° to 125°C.

**Pressure Error Band**

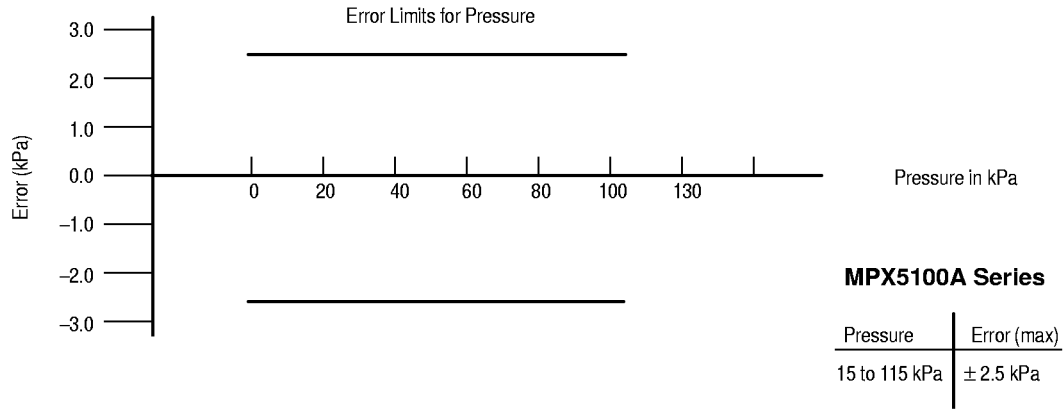

## MPX5100 SERIES

### PRESSURE (P1)/VACUUM (P2) SIDE IDENTIFICATION TABLE

Motorola designates the two sides of the pressure sensor as the Pressure (P1) side and the Vacuum (P2) side. The Pressure (P1) side is the side containing fluoro silicone gel which protects the die from harsh media. The Motorola MPX

pressure sensor is designed to operate with positive differential pressure applied,  $P1 > P2$ .

The Pressure (P1) side may be identified by using the Table below:


Part Number	Case Type	Pressure (P1) Side Identifier
MPX5100A, MPX5100D	867-08	Stainless Steel Cap
MPX5100DP	867C-05	Side with Part Marking
MPX5100AP, MPX5100GP	867B-04	Side with Port Attached
MPX5100GVP	867D-04	Stainless Steel Cap
MPX5100AS, MPX5100GS	867E-03	Side with Port Attached
MPX5100GVS	867A-04	Stainless Steel Cap
MPX5100ASX, MPX5100GSX	867F-03	Side with Port Attached
MPX5100GVSX	867G-03	Stainless Steel Cap

### ORDERING INFORMATION:


The MPX5100 pressure sensor is available in absolute, differential, and gauge configurations. Devices are available in the basic element package or with pressure port fittings that provide printed circuit board mounting ease and barbed hose pressure connections.

Device Name	Options	Case Type	MPX Series	
			Order Number	Device Marking
Basic Element	Absolute	867-08	MPX5100A	MPX5100A
	Differential	867-08	MPX5100D	MPX5100D
Ported Elements	Differential Dual Ports	867C-05	MPX5100DP	MPX5100DP
	Absolute, Single Port	867B-04	MPX5100AP	MPX5100AP
	Gauge, Single Port	867B-04	MPX5100GP	MPX5100GP
	Gauge, Vacuum Port	867D-04	MPX5100GVP	MPX5100GVP
	Absolute, Axial	867E-03	MPX5100AS	MPX5100A
	Gauge, Axial	867E-03	MPX5100GS	MPX5100D
	Gauge, Vacuum Axial	867A-04	MPX5100GVS	MPX5100D
	Absolute, Axial PC Mount	867F-03	MPX5100ASX	MPX5100A
	Gauge, Axial PC Mount	867F-03	MPX5100GSX	MPX5100D
Gauge Vacuum Axial PC Mount	867G-03	MPX5100GVSX	MPX5100D	

**PACKAGE DIMENSIONS**

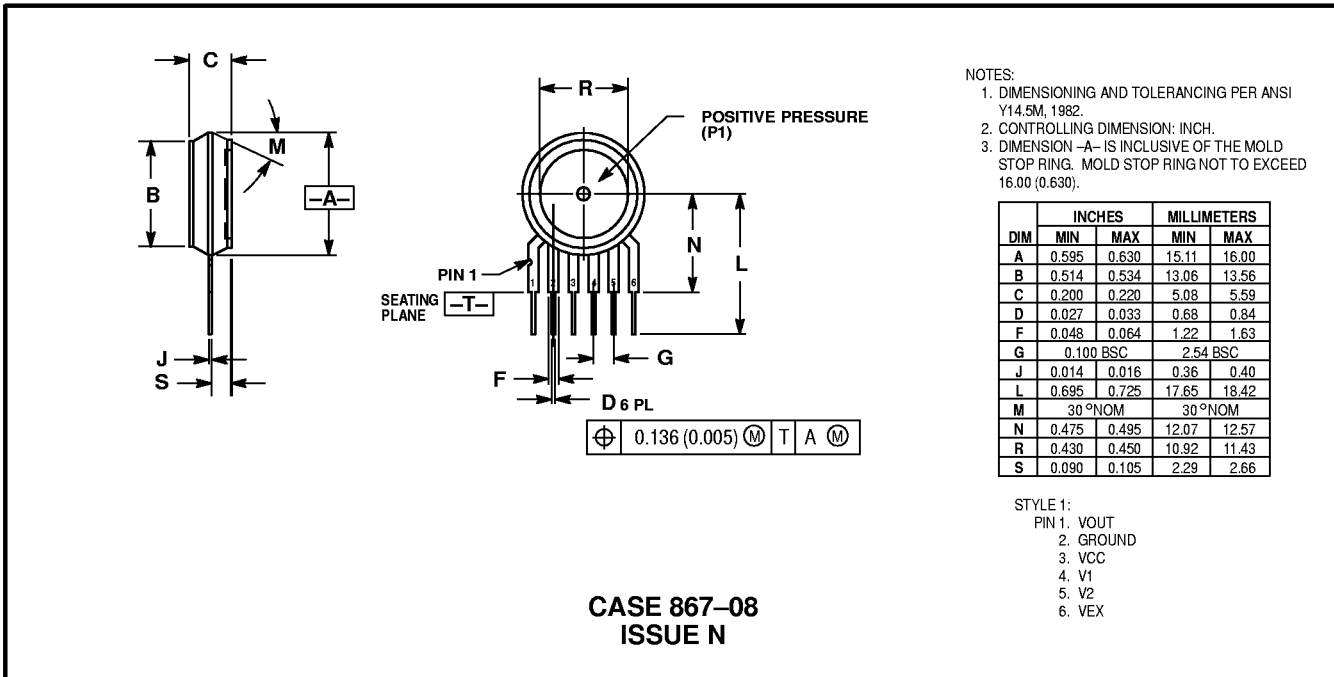


**BASIC ELEMENT (A, D)**

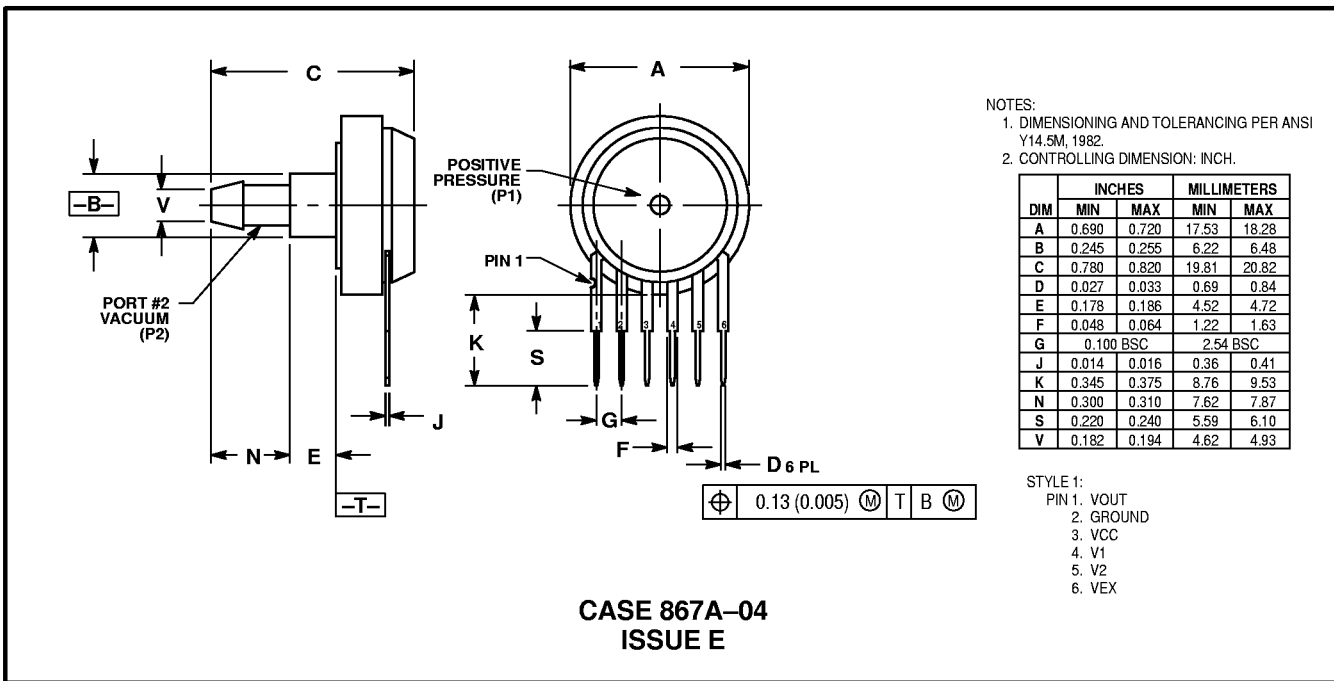


**VACUUM SIDE PORTED (GVS)**

PACKAGE DIMENSIONS—CONTINUED

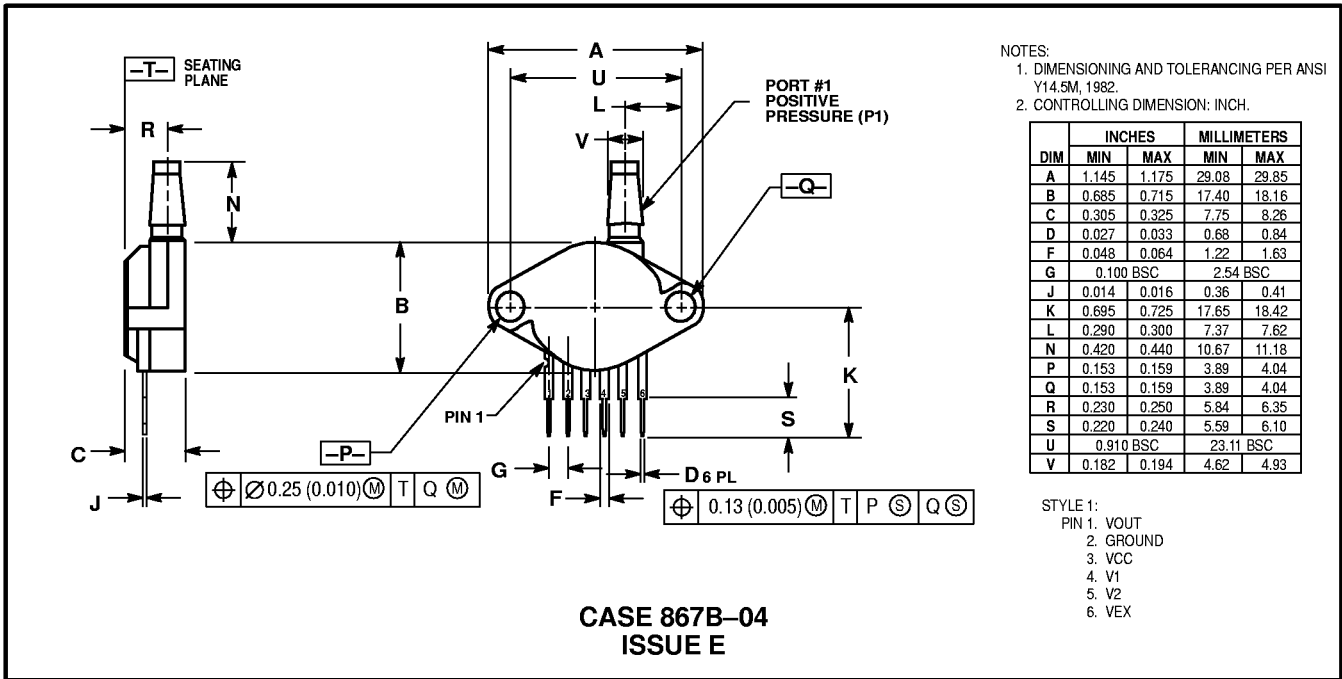


PRESSURE SIDE PORTED (AP, GP)

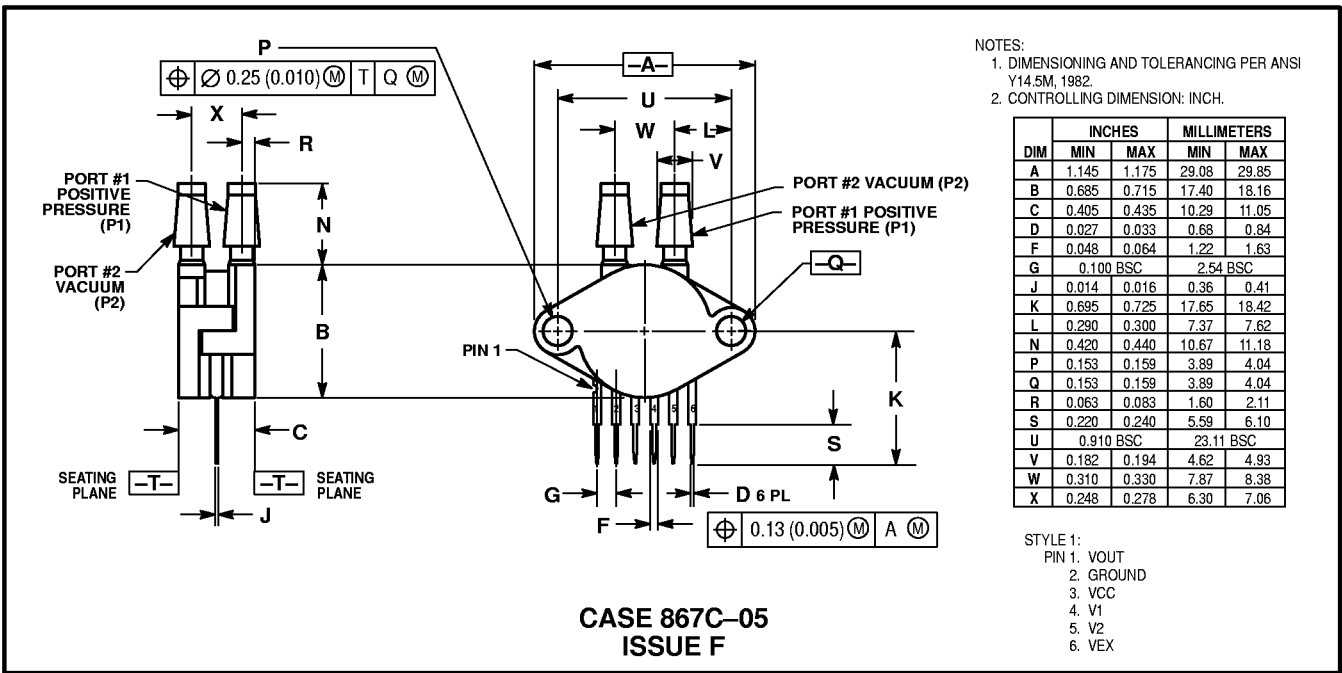


PRESSURE AND VACUUM SIDES PORTED (DP)



PACKAGE DIMENSIONS—CONTINUED

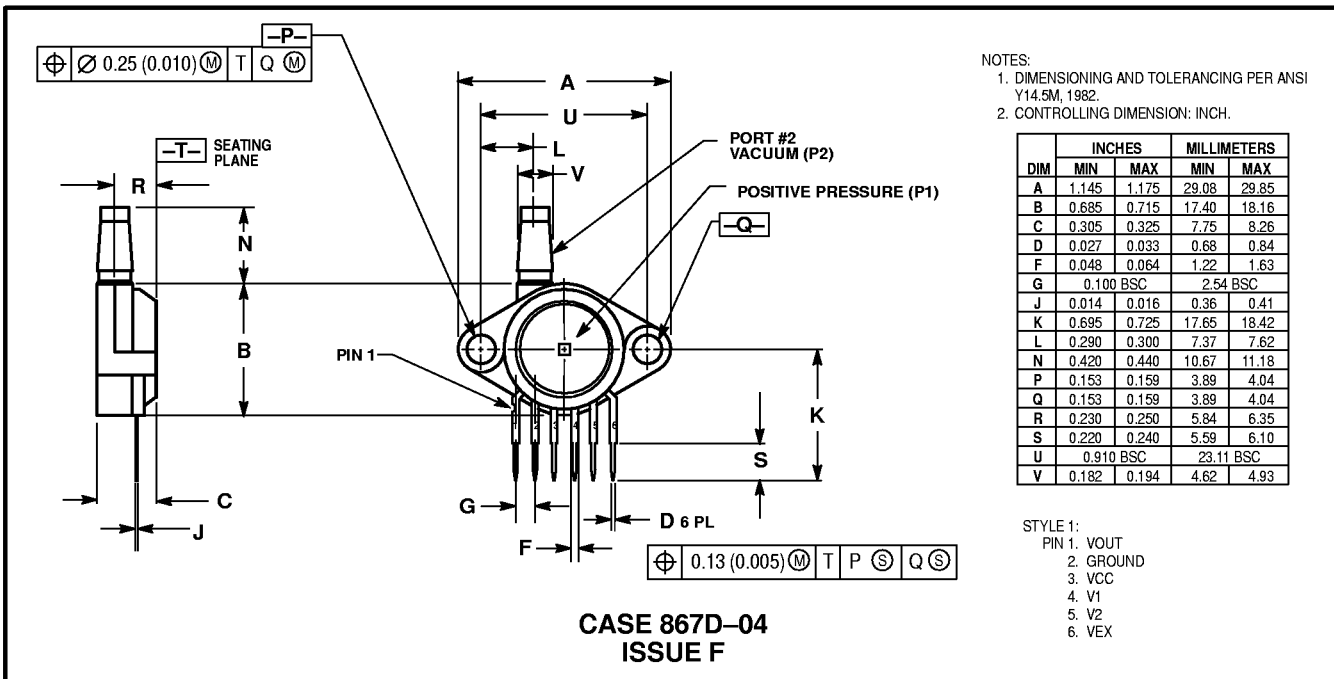


VACUUM SIDE PORTED (GVP)

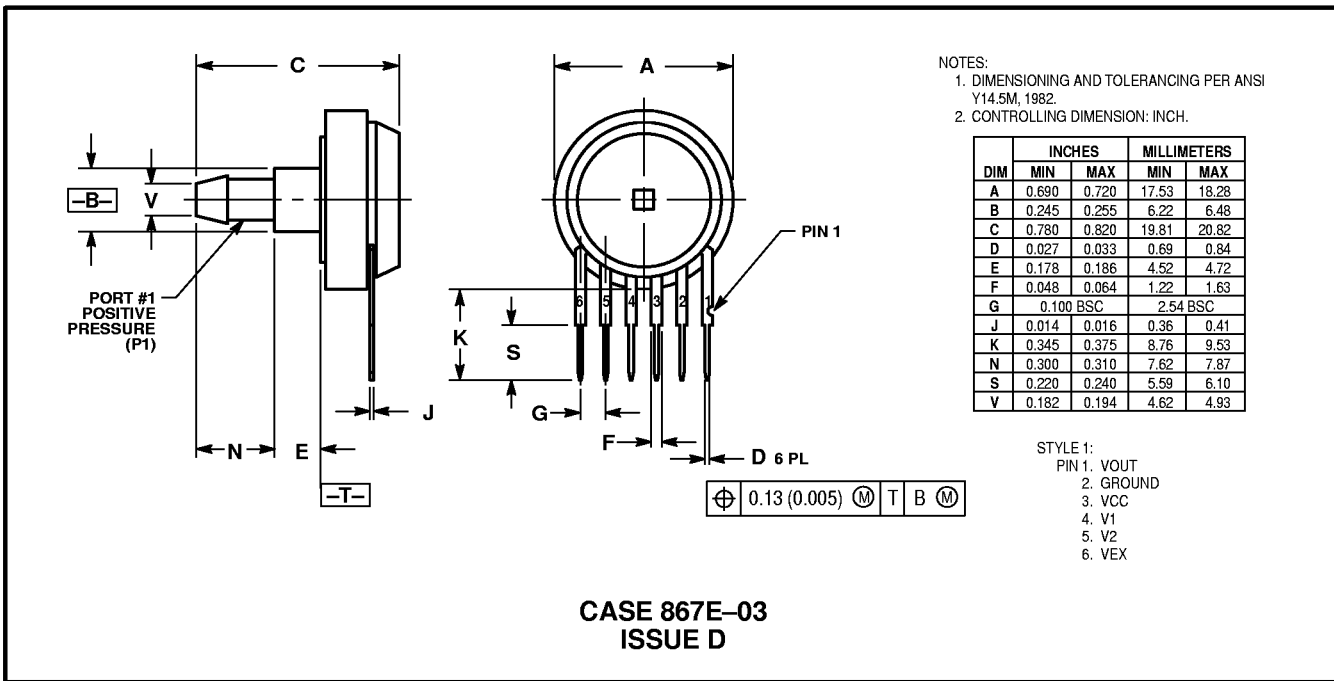


PRESSURE SIDE PORTED (AS, GS)

PACKAGE DIMENSIONS—CONTINUED

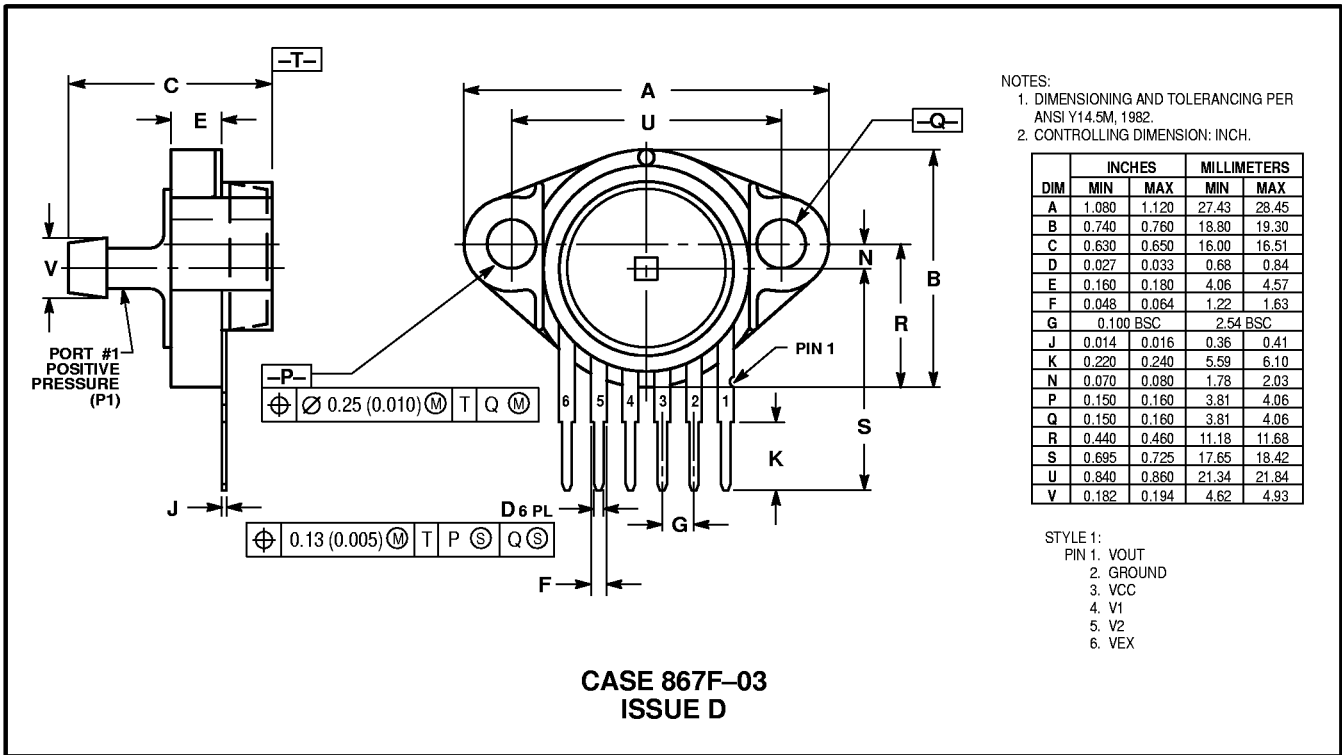

PRESSURE SIDE PORTED (ASX, GSX)

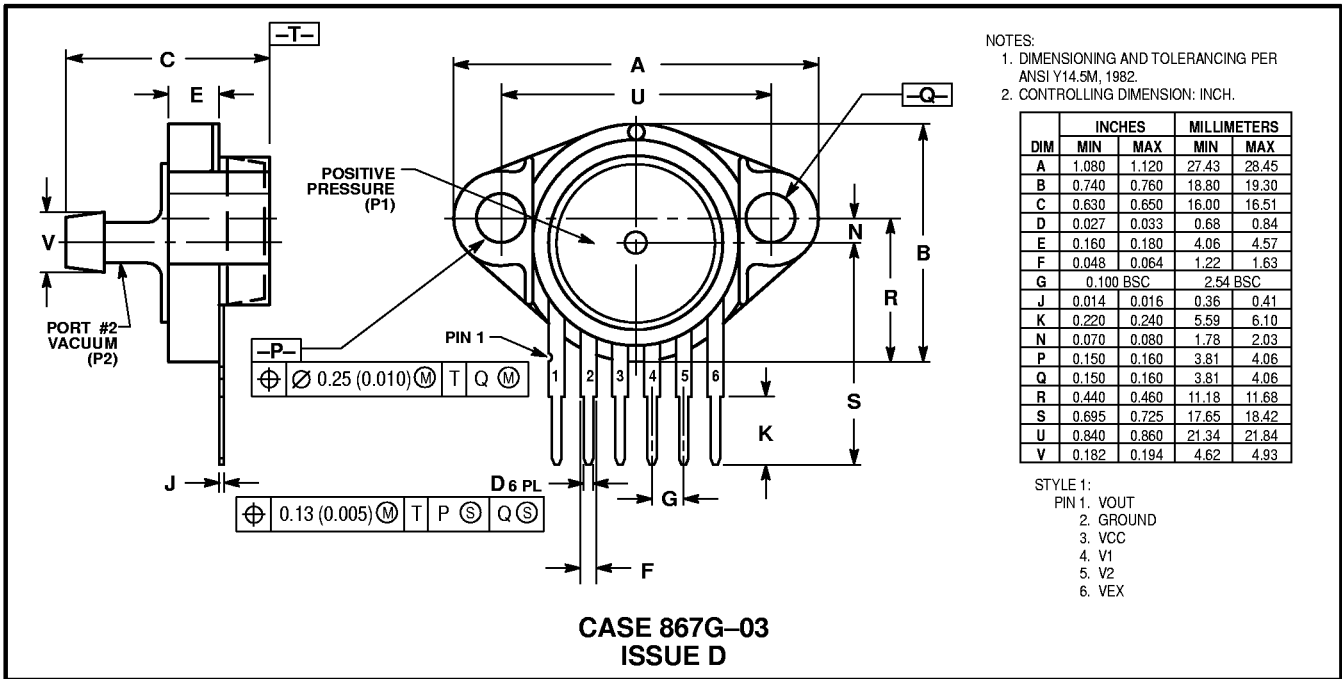

VACUUM SIDE PORTED (GVSX)