


## Power Metal Film Resistors

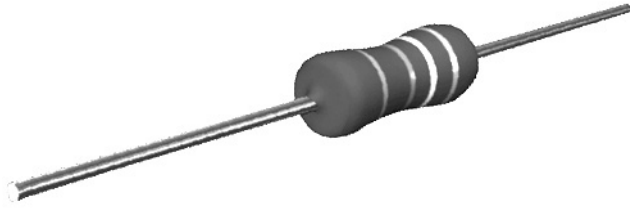

### DESCRIPTION

A homogeneous film of metal alloy is deposited on a high grade ceramic body. After a helical groove has been cut in the resistive layer, tinned connecting wires of electrolytic copper or copper-clad iron are welded to the end-caps. The resistors are coated with a red, nonflammable lacquer which provides electrical, mechanical and climatic protection. This coating is not resistant to aggressive fluxes. The encapsulation is resistant to all cleaning solvents in accordance with "MIL-STD-202E, method 215", and "IEC 60068-2-45".

### FEATURES

- High power in small packages (1 W/0207 size to 3 W/0617 size)
- Different lead materials for different applications
- Defined interruption behaviour
- Lead (Pb)-free solder contacts
- Pure tin plating provides compatibility with lead (Pb)-free and lead containing soldering processes
- Compatible with "Restriction of the use of Hazardous Substances" (RoHS) directive 2002/95/EC (issue 2004)



### APPLICATIONS

- All general purpose power applications

### TECHNICAL SPECIFICATIONS

DESCRIPTION	VALUE				
	PR01	PR02		PR03	
		Cu-lead	FeCu-lead	Cu-lead	FeCu-lead
Resistance Range <sup>(2)</sup>	0.22 Ω to 1 MΩ	0.33 Ω to 1 MΩ	1 Ω to 1 MΩ	0.68 Ω to 1 MΩ	1 Ω to 1 MΩ
Resistance Tolerance and Series	± 1 % (E24, E96 series); ± 5 % (E24 series) <sup>(1)</sup>				
Maximum Dissipation at $T_{amb} = 70\text{ °C}$ :					
$R < 1\ \Omega$	0.6 W	1.2 W	-	1.6 W	-
$1\ \Omega \leq R$	1 W	2 W	1.3 W	3 W	2.5 W
Thermal Resistance ( $R_{th}$ )	135 K/W	75 K/W	115 K/W	60 K/W	75 K/W
Temperature Coefficient	$\leq \pm 250 \times 10^{-6}/K$				
Maximum Permissible Voltage (DC or RMS)	350 V	500 V		750 V	
Basic Specifications	IEC 60115-1 and 60115-4				
Climatic Category (IEC 60068)	55/155/56				
Stability After:					
Load	$\Delta R\ max.: \pm (5\ %\ R + 0.1\ \Omega)$				
Climatic Tests	$\Delta R\ max.: \pm (3\ %\ R + 0.1\ \Omega)$				
Soldering	$\Delta R\ max.: \pm (1\ %\ R + 0.05\ \Omega)$				

#### Notes:

- <sup>(1)</sup> 1 % tolerance is available for  $R_n$ -range from 1 R upwards  
<sup>(2)</sup> Ohmic values (other than resistance range) are available on request  
 • R value is measured with probe distance of  $24 \pm 1\ mm$  using 4-terminal method

### 12NC INFORMATION

The resistors have a 12-digit numeric code starting with 23  
 For 5 % tolerance:

- The next 7 digits indicate the resistor type and packing
- The remaining 3 digits indicate the resistance value:
  - The first 2 digits indicate the resistance value
  - The last digit indicates the resistance decade

For 1 % tolerance:

- The next 6 digits indicate the resistor type and packing
- The remaining 4 digits indicate the resistance value:
  - The first 3 digits indicate the resistance value
  - The last digit indicates the resistance decade

### Last Digit of 12NC Indicating Resistance Decade

RESISTANCE DECADE	LAST DIGIT
0.22 to 0.91 Ω	7
1 to 9.76 Ω	8
10 to 97.6 Ω	9
100 to 976 Ω	1
1 to 9.76 kΩ	2
10 to 97.6 kΩ	3
100 to 976 kΩ	4
1 MΩ	5

### 12NC Example

The 12NC for resistor type PR02 with Cu leads and a value of 750 Ω with 5 % tolerance, supplied on a bandolier of 1000 units in ammopack, is: 2306 198 53751.



12NC - Resistor Type and Packaging <sup>(1)</sup>								
TYPE	LEAD Ø mm	TOL (%)	ORDERING CODE 23.. ... .. (BANDOLIER)					
			AMMOPACK				REEL	
			RADIAL TAPED		STRAIGHT LEADS			
			4000 units	3000 units	52 mm 5000 units	52 mm 1000 units	63 mm 500 units	52 mm 5000 units
PR01	Cu 0.6	1	-	-	<b>22 196 1...</b>	06 191 2...	-	06 191 5...
		5	<b>06 197 03...</b>	-	<b>22 193 14...</b>	06 197 53...	-	<b>06 197 23...</b>
PR02	Cu 0.8	1	-	22 197 2...	-	<b>22 197 1...</b>	-	06 192 5...
		5	-	<b>06 198 03...</b>	-	<b>06 198 53...</b>	-	<b>06 198 23...</b>
PR03	Cu 0.8	5	-	-	-	-	<b>22 195 14...</b>	-
		1	-	-	-	-	-	<b>06 199 6...</b>
	FeCu 0.6	5	-	-	-	22 194 54...	-	-
	FeCu 0.6	5	-	-	-	-	<b>22 195 54...</b>	-

**Notes:**

- <sup>(1)</sup> Other packaging versions are available on request
- Preferred types in bold

12NC - Resistor Type and Packaging						
TYPE	LEAD Ø mm	TOL (%)	ORDERING CODE 23.. ... .. (LOOSE IN BOX)			
			DOUBLE KINK			
			PITCH = 17.8 mm	PITCH = 25.4 mm	PITCH <sup>(2)</sup> <sup>(3)</sup> <sup>(4)</sup>	
			1000 units	500 units	1000 units	500 units
PR01	Cu 0.6	5	22 193 03...	-	-	-
	FeCu 0.6	5	22 193 43...	-	<b>22 193 53...</b> <sup>(2)</sup>	-
PR02	Cu 0.8	5	22 194 23...	-	-	-
	FeCu 0.6	5	22 194 83...	-	-	-
PR03	Cu 0.8	5	-	22 195 23...	-	-
	FeCu 0.6	5	-	22 195 83...	-	-
	FeCu 0.8	5	-	-	-	<b>22 195 63...</b> <sup>(4)</sup>

**Notes:**

- <sup>(2)</sup> PR01 pitch 12.5 mm
- <sup>(3)</sup> PR02 pitch 15.0 mm
- <sup>(4)</sup> PR03 pitch 20.0 mm, with reversed kinking direction as opposed to the drawing for the type with double kink figure
- Preferred types in bold


PART NUMBER AND PRODUCT DESCRIPTION																									
PART NUMBER: PR02000201001JA100																									
<table border="1" style="width:100%; text-align:center;"> <tr> <td>P</td><td>R</td><td>0</td><td>2</td><td>0</td><td>0</td><td>0</td><td>2</td><td>0</td><td>1</td><td>0</td><td>0</td><td>1</td><td>J</td><td>A</td><td>1</td><td>0</td><td>0</td> </tr> </table>								P	R	0	2	0	0	0	2	0	1	0	0	1	J	A	1	0	0
P	R	0	2	0	0	0	2	0	1	0	0	1	J	A	1	0	0								
MODEL/SIZE	SPECIAL CHARACTE	WIRE TYPES	TCR/MATERIAL	VALUE	TOLERANCE	PACKAGING <sup>(1)</sup>	SPECIAL																		
PR0100 PR0200 PR0300	0 = Neutral Z = Value overflow (Special)	1 = Cu 0.6 2 = Cu 0.8 3 = FeCu 0.6 4 = FeCu 0.8	0 = Standard	3 digit value 1 digit multiplier MULTIPLIER  7 = *10 <sup>-3</sup> 2 = *10 <sup>2</sup> 8 = *10 <sup>-2</sup> 3 = *10 <sup>3</sup> 9 = *10 <sup>-1</sup> 4 = *10 <sup>4</sup> 0 = *10 <sup>0</sup> 5 = *10 <sup>5</sup> 1 = *10 <sup>1</sup>	F = ± 1 % J = ± 5 %	N4    R5 N3    L1 A5    DC A1    K1 AC    B1 R5    PC	The 2 digits are used for all special parts. 00 = Standard																		
PRODUCT DESCRIPTION: PR02 5 % A1 1K0																									
PR02	5 %	A1	1K0																						
MODEL/SIZE	TOLERANCE	PACKAGING <sup>(1)</sup>	RESISTANCE VALUE																						
PR01 PR02 PR03	± 1 % ± 5 %	N4    L1 N3    DC A5    K1 A1    B1 AC    PC R5	1K0 = 1 kΩ 4K75 = 4.75 kΩ																						

**Notes:**

- <sup>(1)</sup> Please refer to table PACKAGING for details
- The PART NUMBER is shown to facilitate the introduction of a unified part numbering system for ordering products


PACKAGING			
CODE	PIECES	DESCRIPTION	MODEL/SIZE
N4	4000	Bandolier in ammpack radial taped	PR01
N3	3000	Bandolier in ammpack radial taped	PR02
A5	5000	Bandolier in ammpack straight leads 52 mm	PR01
A1	1000	Bandolier in ammpack straight leads 52 mm	PR01, PR02
AC	500	Bandolier in ammpack straight leads 63 mm	PR03
R5	5000	Bandolier on reel straight leads 52 mm	PR01, PR02
L1	1000	Loose in box with Double Kink, pitch 17.8 mm	PR01, PR02
DC	500	Loose in box with Double Kink, pitch 25.4 mm	PR03
K1	1000	Loose in box with Double Kink, pitch 12.5 mm	PR01
B1	1000	Loose in box with Double Kink, pitch 15.0 mm	PR02
PC	500	Loose in box with Double Kink, pitch 20.0 mm	PR03

**DIMENSIONS**

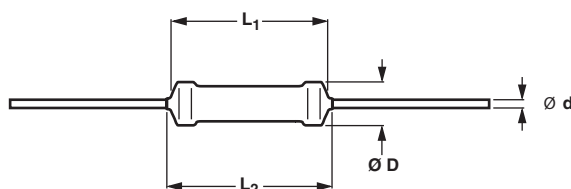

Type with straight leads

DIMENSIONS - straight lead type and relevant physical dimensions; see straight leads outline					
TYPE	Ø D <sub>max.</sub> (mm)	L <sub>1</sub> max. (mm)	L <sub>2</sub> max. (mm)	Ø d (mm)	
				Cu	FeCu
PR01	2.5	6.5	8.5	0.58 ± 0.05	-
PR02	3.9	10.0	12.0	0.78 ± 0.05	0.58 ± 0.05
PR03	5.2	16.7	19.5	0.78 ± 0.05	0.58 ± 0.05

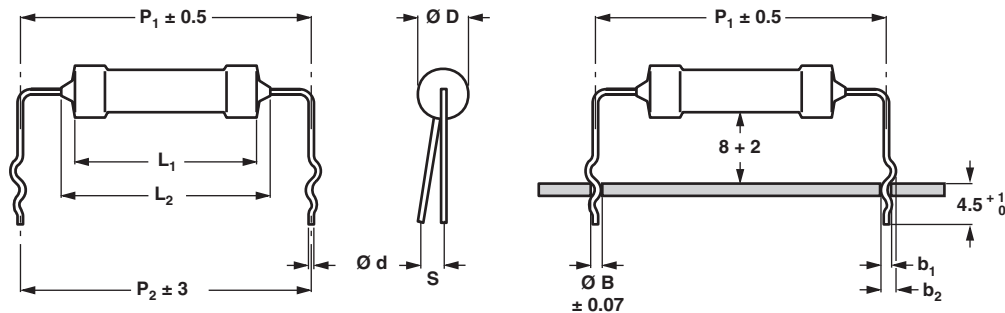

Type with double kink

Dimensions in millimeters

DIMENSIONS - double kink lead type and relevant physical dimensions; see double kinked outline										
TYPE	LEAD STYLE	Ø d (mm)		b <sub>1</sub> (mm)	b <sub>2</sub> (mm)	Ø D <sub>max.</sub> (mm)	P <sub>1</sub> (mm)	P <sub>2</sub> (mm)	S <sub>max.</sub> (mm)	Ø B (mm)
		Cu	FeCu							
PR01	double kink large pitch	0.58 ± 0.05	0.58 ± 0.05	1.10 + 0.25/- 0.20	1.45 + 0.25/- 0.20	2.5	17.8	17.8	2	0.8
	double kink small pitch	-	0.58 ± 0.05	1.10 + 0.25/- 0.20	1.45 + 0.25/- 0.20		12.5	12.5	2	0.8
PR02	double kink large pitch	0.78 ± 0.05	0.58 ± 0.05	1.10 + 0.25/- 0.20	1.45 + 0.25/- 0.20	3.9	17.8	17.8	2	0.8
	double kink small pitch	-	0.78 ± 0.05	1.30 + 0.25/- 0.20	1.65 + 0.25/- 0.20		15.0	15.0	2	1.0
PR03	double kink large pitch	0.78 ± 0.05	0.58 ± 0.05	1.10 + 0.25/- 0.20	1.65 + 0.25/- 0.20	5.2	25.4	25.4	2	1.0
	double kink small pitch	-	0.78 ± 0.05	1.30 + 0.25/- 0.20	2.15 + 0.25/- 0.20		22.0	20.0	2	1.0

MASS PER 100 UNITS	
TYPE	MASS (g)
PR01 Cu 0.6 mm	21.2
PR01 FeCu 0.6 mm	20.7
PR02 Cu 0.8 mm	50.4
PR02 FeCu 0.6 mm	40.6
PR02 FeCu 0.8 mm	49.6
PR03 Cu 0.8 mm	119.2
PR03 FeCu 0.6 mm	107.9
PR03 FeCu 0.8 mm	118.5

**MARKING**

The nominal resistance and tolerance are marked on the resistor using four colored bands in accordance with IEC publication 60062, "Color codes for fixed resistors".

**OUTLINES**


The length of the body ( $L_1$ ) is measured by inserting the leads into holes of two identical gauge plates and moving these plates parallel to each other until the resistor body is clamped without deformation ("IEC publication 60294").

**FUNCTIONAL DESCRIPTION**


**PRODUCT CHARACTERIZATION**

Standard values of nominal resistance are taken from the E96/E24 series for resistors with a tolerance of  $\pm 1\%$  or  $\pm 5\%$ . The values of the E96/E24 series are in accordance with "IEC publication 60063".


**FUNCTIONAL PERFORMANCE**

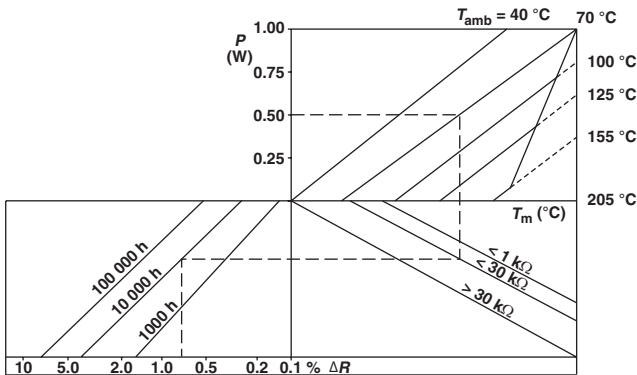

PR01 Drift nomogram

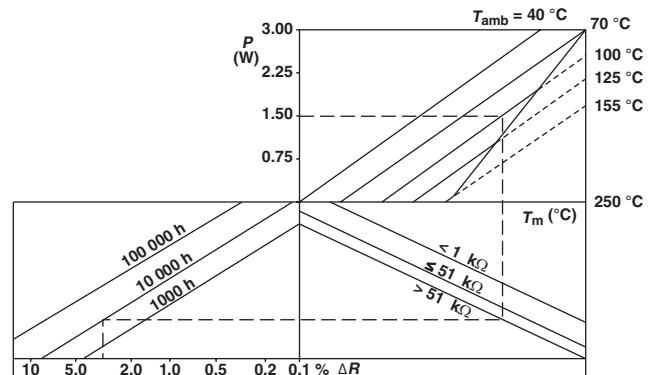

PR03 Drift nomogram

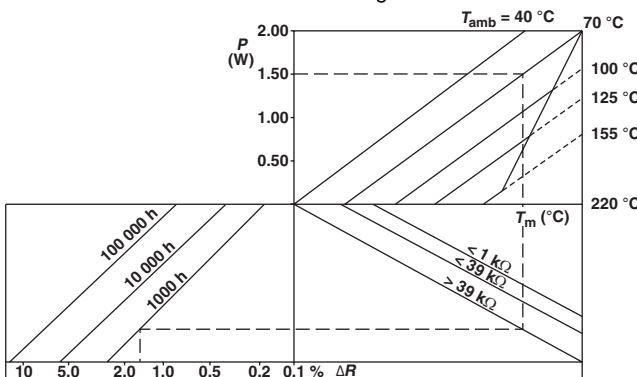

PR02 Drift nomogram

**LIMITING VALUES**

TYPE	LEAD MATERIAL	RANGE	LIMITING VOLTAGE <sup>(1)</sup> (V)	LIMITING POWER (W)
PR01	Cu	$R < 1 \Omega$	350	0.6
		$1 \Omega \leq R$		1.0
PR02	Cu	$R < 1 \Omega$	500	1.2
		$1 \Omega \leq R$		2.0
	FeCu	$1 \Omega \leq R$		1.3
PR03	Cu	$R < 1 \Omega$	750	1.6
		$1 \Omega \leq R$		3.0
	FeCu	$1 \Omega \leq R$		2.5

**Note:**

- <sup>(1)</sup> The maximum voltage that may be continuously applied to the resistor element, see "IEC publication 60115-1".
- The maximum permissible hot-spot temperature is 205 °C for PR01, 220 °C for PR02 and 250 °C for PR03.

**MOUNTING**

The resistors are suitable for processing on automatic insertion equipment and cutting and bending machines.

MOUNTING PITCH			
TYPE	LEAD STYLE	PITCH	
		mm	e
PR01	straight leads	12.5 <sup>(1)</sup>	5 <sup>(1)</sup>
	radial taped	4.8	2
	double kink large pitch	17.8	7
	double kink small pitch	12.5	5
PR02	straight leads	15.0 <sup>(1)</sup>	6 <sup>(1)</sup>
	radial taped	4.8	2
	double kink large pitch	17.8	7
	double kink small pitch	15.0	6
PR03	straight leads	23.0 <sup>(1)</sup>	9 <sup>(1)</sup>
	double kink large pitch	25.4	10
	double kink small pitch	20.0	8

**Note:**

- <sup>(1)</sup> Recommended minimum value.