



element14

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[MC-20PLCC](#)

EN
This Datasheet is presented by
the manufacturer

DE
Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR
Cette fiche technique est
présentée par le fabricant

PLCC Socket

RoHS
Compliant



Specifications:

Material:

Insulator : PPS, glass reinforced
Insulator Colour : Black
Contacts : Phosphor bronze

Plating:

Tin over copper underplate overall

Electrical:




Max. Operating Voltage : 250V AC
Max. Current Rating : 1A
Max. Contact Resistance : 30mΩ
Min. Insulation Resistance : 1,000MΩ
Dielectric Withstanding Voltage : 500V AC for 1 min

Temperature Rating:

Operating Temperature : -55°C to +105°C

Environmental:

Lead Free
Recommended Soldering Temperature : 235°C for 5 s

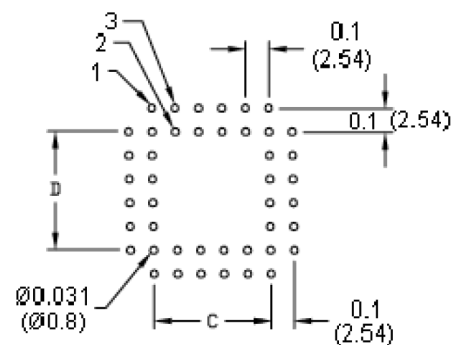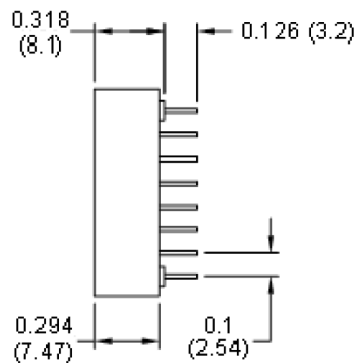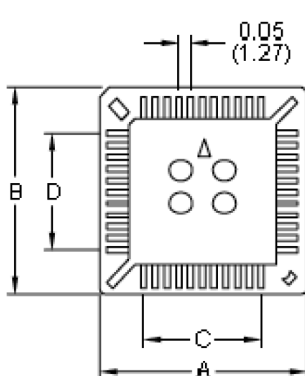

Recommended
PCB Layout

Dimensions : Inches (Millimetres)

Specification Table:

Part Number	Positions	A		B		C		D		Mounting Style
		Inches	mm	Inches	mm	Inches	mm	Inches	mm	
MC-20PLCC	20	0.61	15.5	0.61	15.5	0.2	5.08	0.2	5.08	Thru-hole
MC-28PLCC	28	0.71	18.03	0.71	18.03	0.3	7.62	0.3	7.62	
MC-32PLCC	32	0.71	18.03	0.81	20.57	0.3	7.62	0.4	10.16	
MC-44PLCC	44	0.925	23.5	0.925	23.5	0.5	12.7	0.5	12.7	
MC-52PLCC	52	1.018	25.88	1.018	25.88	0.6	15.24	0.6	15.24	
MC-68PLCC	68	1.245	31.6	1.245	31.6	0.8	20.32	0.8	20.32	
MC-84PLCC	84	1.445	36.7	1.445	36.7	1	25.4	1	25.4	

Unless otherwise specified all dimensions are inches (mm)

Tolerances : except as noted

Inches	Holes
.X : ±0.1	Ø.X : ±0.1
.XX : ±0.02	Ø.XX : ±0.015
.XXX : ±0.015	Ø.XXX : ±0.01

Part Number Table

Description	Part Number
PLCC Socket, 20 Pin, Thru-hole	MC-20PLCC
PLCC Socket, 28 Pin, Thru-hole	MC-28PLCC
PLCC Socket, 32 Pin, Thru-hole	MC-32PLCC
PLCC Socket, 44 Pin, Thru-hole	MC-44PLCC
PLCC Socket, 52 Pin, Thru-hole	MC-52PLCC
PLCC Socket, 68 Pin, Thru-hole	MC-68PLCC
PLCC Socket, 84 Pin, Thru-hole	MC-84PLCC

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.



element14

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[MC-20PLCC](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant